


Delete This Page before Use



<b>Material</b>	《Absenicon Series Product Introduction》		
<b>Usage</b>	For external use		
<b>Publish Time</b>	10 <sup>th</sup> , Apr., 2021	<b>Version</b>	V1.4
<b>The 1<sup>st</sup> Version Released Time</b>	11 <sup>th</sup> , Nov., 2020	<b>Version</b>	V1.0
<b>Department</b>	Product Marketing Dept.		
<b>Author</b>	Belinda Yale		
<b>Verify</b>	Roger Luo		
<b>English Translation Review</b>	Emma Zhang		
<b>Modify Record</b>	<b>Time</b>	<b>Page+ Content</b>	<b>Correctors</b>
V1.1	2021.01.14	P3\P4\P18 Delete C220 related infos.	Belinda
V1.2	2021.01.29	P6\P20 Added information that the brightness can be customized to a maximum of 600nit	Belinda
V1.3	2021.02.05	P7 changed the background image	Belinda
V1.4	2021.04.10	P20 added the specification of C110 &C165	Belinda

**Ab**sen

Trusted LED Supplier

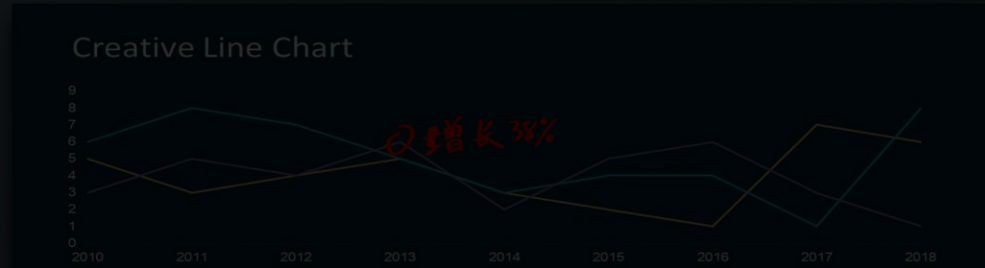

**Ab**sen**icon**

Delivering the Ultimate Meeting Experience

# Standard All-in-one LED Screen

Absenicon is a revolutionary all-in-one LED screen for conferencing,  
It helps users to better facilitate presentations, brainstorming, and decision-making.



## *Absenicon*

Model: C110/ C138/ C165

Size: 110"/138"/165"

Resolution: 1920×1080

Depth: 28.5mm

# Standard Large-Format LED Screen

Absenicon comes in three standard large sizes. It displays content without lines or distortions, delivering a more immersive viewing experience

 standard size	 standard aspect ratio
 remote control	 screen mirroring
 video conference	 dual system



110" /138" /165" multiple sizes

# Ultra-slim Frame

With the 94%\* screen-to-body ratio and frame stripped back to 5 mm, Absenicon providing an more immersive experience for all the viewers.

5mm

ultra-slim frame

94%

screen-to-body ratio

28.5mm

depth



# Refresh Your Vision

Experience stunning visual performance with Absenicon. Every dark or bright detail looks vivid and clear with its 110% NTSC cinematic level colour gamut and 350\* nits brightness.

1920 x 1080

High Definition



high refresh rate




high gray scale



wide color gamut



low refresh rate

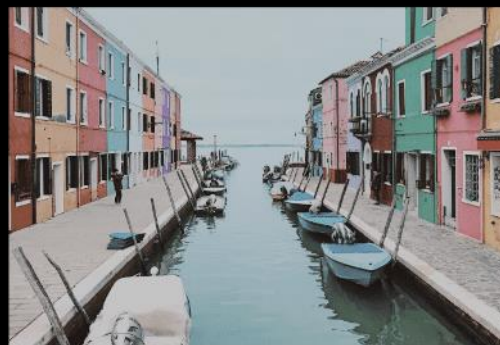

low gray scale



narrow color gamut

# Ultra Wide Viewing Angle

A 160° wide viewing angle allows everyone see fine details and vibrant colors from either side of the room.



160°

# Smart Control

Absenicon brings the connectivity of smart TVs to a larger more dynamic LED display.  
And multiple functions can be realized through remote control.



Power on/off




Switching



Brightness adjustment



Menu setting

The background of the image shows a large LED display with a vibrant, abstract pattern of blue and purple waves. At the bottom of the display, the "Absen" logo is visible. In the bottom right corner, a portion of a black remote control is shown, featuring a red power button, a directional pad, and several other function buttons.

Absen



# Easy and Reliable Content Sharing

Absenicon supports screen mirroring through computer, mobile phone and PAD screen. The screen share up to 4 devices at one time wirelessly, allowing creativity display simultaneously. The mobile phone/PAD screen can work as a writing board, enabling online editing.



Screen Mirroring



Online Editing

# Video Conference

Abysen

Compatible with mainstream video conferencing software, experience efficient video conferencing



# Extraordinary Sound

2\*20W built-in speakers acoustic design delivers exceptional audio and an immersive listening experience



# Comfortable Experience

Screen surface temperature  $\leq 40^{\circ}\text{C}$ ,  $\leq 25\text{dB}$  mute technology  
Creating a comfortable office environment



# Eye Protection

One-click for the soft light mode, which reduces harmful blue light, creating healthy viewing experience for the audience.




The eye protection mode can reduce the harmful blue light that causes eye fatigue

# Four Modes for Various Environments

4 modes for different using environments, offering perfect visual performance for viewers during the process of document presentation, video play and remote conference.



standard mode

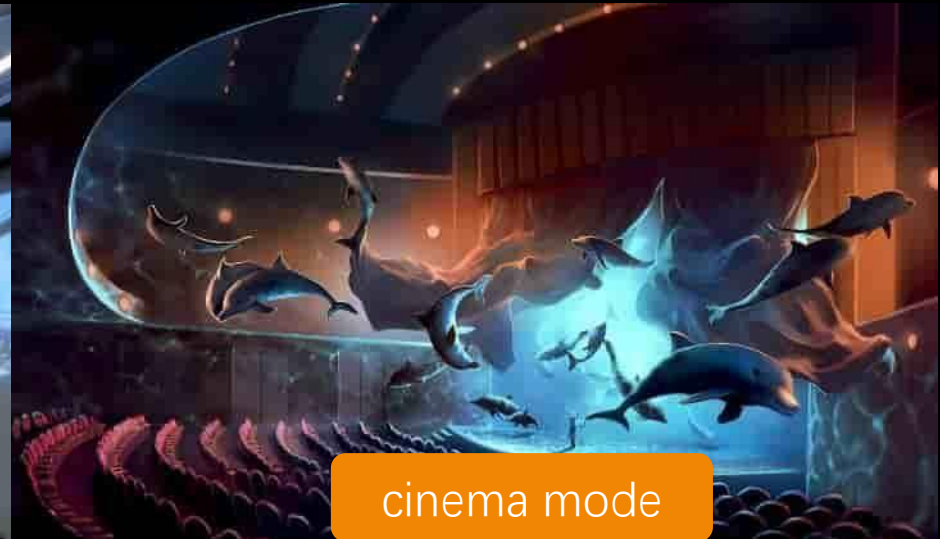

cinema mode



meeting mode



soft light mode

# Dual Operating Systems

Absenicon comes pre-loaded with Android and Windows operating systems

Dual system | Dual frequency WIFI | 4+16G storage capacity




Android System



Windows System(Optional)


# Fast Installation and Maintenance

Absenicon supports full front maintenance installation and maintenance

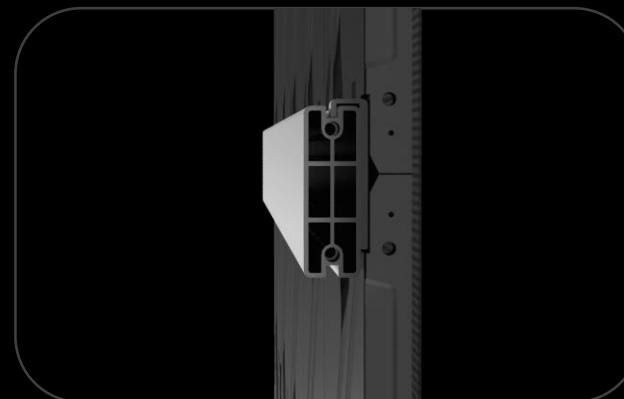

## Fast installation

2 people complete the installation in 2 hours

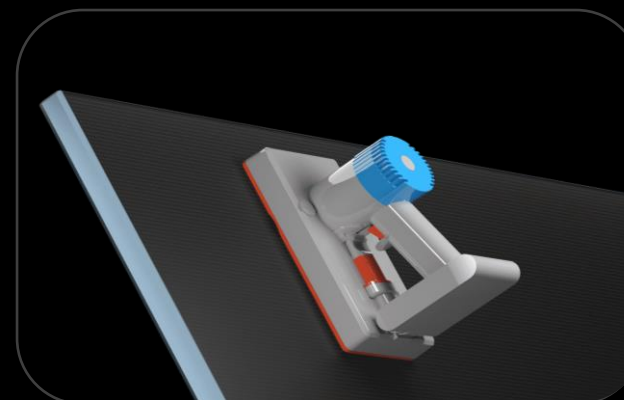

## Fast Maintenance


Full front maintenance, single module disassembly only takes 2 seconds



# Free Installation Option

Absenicon supports wall mounting and mobile stand installation

wall mounting

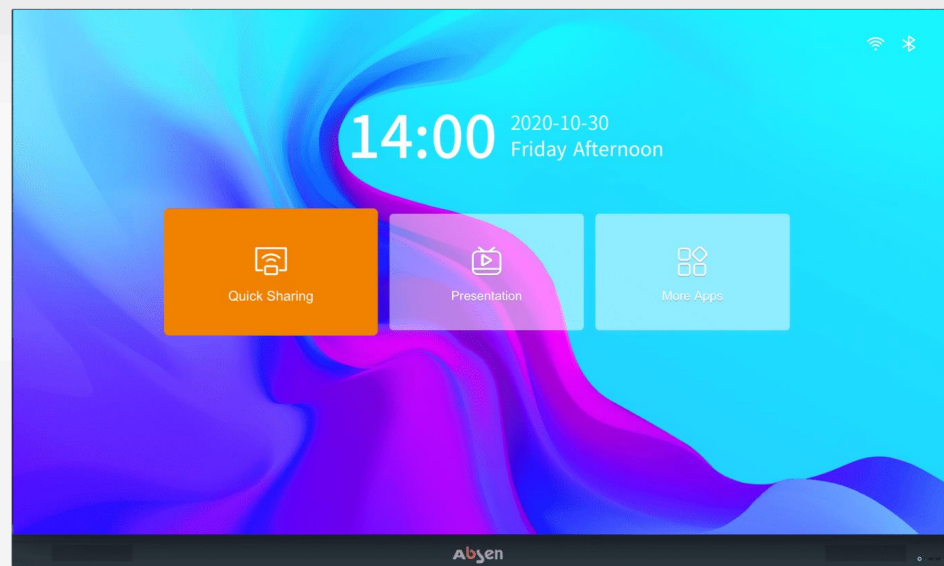

mobile stand



# Choose a suitable size for conference

Large, medium and small rooms, lecture halls, training rooms



## Small

attendance: 20~40

Recommended model: C110



## Medium

attendance: 30~50

Recommended model: C138



## Large

attendance: 60~100

Recommended model : C165

# Diverse Applications

Absenicon is versatile and reliable, perfect for various applications.



## Meeting Room

Enterprises/government /financial sector/hotels



## Lecture Hall

Various education fields, national laboratories, scientific research institutions, and forums



## Others

Applied in exhibition, medical, training room and other fields

# Specifications

Model	C110	C138	C165
Diagonal size (inch)	110	138	165
Display area (H x V) (mm)	2440*1372	3050*1715	3660*2058
Resolution	1920x1080	1920x1080	1920x1080
Depth (mm)	28.5	28.5	28.5
Weight (kg)	92	135	198
Standard Brightness	350nit	350nit	350nit
Contrast Ratio	4000: 1	5000: 1	4000: 1
View Angle (°)	160/140	160/140	160/140
Input Power	AC 100-240V	AC 100-240V	AC 100-240V
Avg. power (w)	400	500	600
Max. power (w)	1200	1500	1800
Android system	Android 8.0		
System memory	4GB		
Storage	16GB		
Input/output interface	HDMI2.0*3, USB2.0*1, USB3.0*3, Audio OUT*1, SPDIF OUT*1, RJ45*1		
OPS	Support		
Operating temperature	-10°C ~ 40°C		
Operating humidity	10 ~ 80%RH		
Storage temperature	-40°C ~ 60°C		
Storage humidity	10% ~ 85%		

***THANK YOU!***

**Ab**sen

Trusted LED Supplier

